OPTIONS

- 3/2 solenoid valves piloting: series 189, series 190 with M12 connection, series 192
- 16 bar version (wide ambient temperature range: -10°C to +90°C):

type of valve	(M)	catalogue number
190 NF 16 bar	×	**19060016**
	●	**19060019**
	▼	**19060017**

- Material and solenoid pilot valve for use in potentially **explosive atmospheres** caused by gases or dusts - ATEX directive 2014/34/EU (contact us)
- Connector with cable 2 m long
- Connector with transil protection
- Solenoid valve with plug and built-in visual control and protection :

Solenoid valve **without** connector + Connector with built-in visual control and VDR/RC protection

type of valve	(M)	catalogue number solenoid valve **without** connector
190 NF	×	**19000013**
	●	**19000014**
	▼	**19000018**

catalogue number (~ / =)			
24V	48V	115V	230V
88122603	**88122604**	**88122605**	**88122608**

(M) Type of manual operator on pilot(s) : × : without ● : maintained ▼ : impulse

SUBBASES AND ACCESSORIES : see preceding pages

DIMENSIONS (mm), WEIGHT (kg)

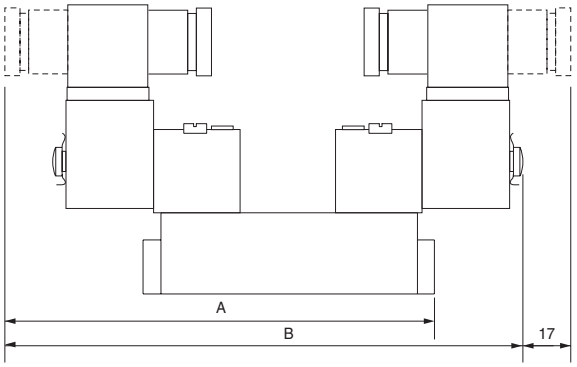

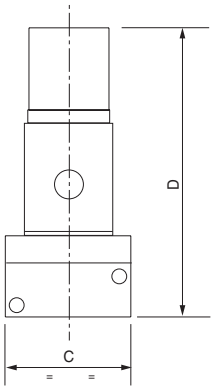

size	type	A	B	C	D	weight (kg)
ISO1	BA	136,0	—	42,0	102,0	0,50
	BB	—	168,0	42,0	102,0	0,60
ISO2	BA	149,0	—	50,8	104,6	0,70
	BB	—	169,0	50,8	104,6	0,80
ISO3	BA	179,0	—	63,5	114,0	1,10
	BB	—	196,7	63,5	114,0	1,26

incl. bolts and gaskets

00643GB-2017/R01
Availability, design and specifications are subject to change without notice. All rights reserved.

BCAE Industrial Automation
青岛莱诚自动化设备有限公司
地址：中国.青岛市重庆南路99号海尔云街甲3号楼7F
服务热线：4006-918-365
网址：http://www.asco.store
传真：(86-532)585-10-365
Email：sales@bechinas.com